Order No.
 500002573

 Model No.
 500002573 (Ignite Evolve 50 inch)

Notes:

Section 10309 - Manufactured Electric Fireplaces

PART 1 GENERAL

1.1 SECTION INCLUDES

- A. Manufactured electric fireplaces.
- B. Accessories

1.2 RELATED SECTIONS

A. Section 06100 - Rough Carpentry: Wood framed rough opening and enclosure.

1.3 REFERENCES

- A. UL 2021
- B. CSA C22.2 No. 46

1.4 SUBMITTALS

- A. Submit under provisions of Section 01300.
- B. Product Data: Manufacturer's data sheets on each product to be used, including:
 - 1. Preparation instructions and recommendations.
 - 2. Storage and handling requirements and recommendations.
 - 3. Installation methods.
- C. Manufacturer's Certificates: Certify products meet or exceed specified requirements.
- D. Manufacturer's warranty.

1.5 DELIVERY, STORAGE, AND HANDLING

- A. Store products in manufacturer's unopened packaging until ready for installation.
- B. Protect materials from exposure to moisture. Do not deliver until after wet work is complete and dry.

1.6 WARRANTY

A. Provide the manufacturer's 5-year limited warranty on electrical components.

PART 2 PRODUCTS

2.1 ACCEPTABLE MANUFACTURERS

- A. Pre-fabricated Electric Fireplace:
 - Base: Dimplex Electric Fireplace Glen Dimplex Americas 1367 Industrial Road Cambridge ON N3H 4W3 1-888-346-7539 www.dimplex.com
 - 2. Substitutions not permitted
 - 3. Requests for substitutions will be considered in accordance with provisions of Section 01600.

 Order No.
 500002573

 Model No.
 500002573 (Ignite Evolve 50 inch)

Notes:

Section 10309 - Manufactured Electric Fireplaces

2.2 ELECTRIC FIREPLACES

A. General:

- 1. Provide all components and accessories required for a complete, functional unit.
- 2. cULus listed, file E71416

B. Pre-fabricated Electric Fireplace:

- 1. Base Product:
 - a) Dimplex Ignite Evolve Linear Electric Fireplace
 - b) Material Number: 50002573
 - c) Regulatory model number: 691408XXXX
- 2. Description: Realistic 50" linear electric fireplace
- 3. Dimensions:
 - a) Width: 51-1/2" / 130.6 cm
 - b) Height: 16-1/2" / 41.9 cm
 - c) Depth: 5-7/8" / 14.7 cm
- 4. Framing Dimensions:
 - a) Width: 50-5/8" / 128.6 cm
 - b) Height:16" / 40.6 cm
 - c) Depth: 3-1/2" / 9.0 cm
- 5. Electrical:
 - a) Volts: 120 V, 240 V
 - b) Watts: 1500 W, 2500 W
 - c) BTUs: 5000 / 8530
 - d) Amps: 12.5 / 10.4
- 6. Venting: Non-venting
- 7. Operation: Flame only, flame and heat
- 8. Heating: Louver-less, fan-forced circulation
- 9. Liner: Steel
- 10. Standard features:
 - a) A new multi-layered color effect that creates a sense of depth. Color settings can be controlled independently or combined in one of seven presets.
 - b) Ambient Light Sensor automatically adjusts firebox light to suit the room or can be customized with a range of preset colors.
 - c) The multi-media bed includes acrylic crystals, tumbled glass, and driftwood logs.
 - d) LED flame technology
 - e) Hard wire capabilities 120V, 240V

 Order No.
 500002573

 Model No.
 500002573 (Ignite Evolve 50 inch)

Notes:

Section 10309 - Manufactured Electric Fireplaces

- f) Built-in touch controls
- g) Built-in Timer Set for up to 8 hours.
- h) Seamless installation and edge to edge glass
- i) Equipped with integrated smart technology that provides maintenance and operation feedback
- 11. Control options:
 - a) Flame Connect mobile app
 - b) Multi-function remote control
 - c) Built-in hidden controls (Standby, heat on/off, thermostat, brightness, flame theme)

PART 3 EXECUTION

3.1 INSPECTION

- A. Do not begin installation until substrates have been properly prepared.
- B. If substrate preparation is the responsibility of another installer, notify Architect of unsatisfactory preparation before proceeding.
- C. Verify proper power supply and fuel source are available.

3.2 PREPARATION

- A. Clean surfaces thoroughly prior to installation.
- B. Prepare surfaces using the methods recommended by the manufacturer for achieving the best result for the substrate under the project conditions.

3.3 INSTALLATION

- A. Install in accordance with manufacturer's instructions and requirements of authorities having jurisdiction.
- B. Use manufacturer's guidelines for minimum clearances to combustibles, walls, and finishes.
- C. Anchor all components firmly in position for long life under hard use.
- D. Upon completion of installation, visually inspect all exposed surfaces. Touch up scratches and abrasions with touch up paint recommended by the manufacturer; make imperfections invisible to the unaided eye from a distance of 5 feet (1.5 m).
- E. To use the mobile app, install where a WiFi connection is available.


3.4 **PROTECTION**

- A. Protect installed products until completion of project.
- B. Touch-up, repair or replace damaged products before Substantial Completion.

END OF SECTION

Product Dimensions:


Installs without trim to stone, brick and other solid finish materials; includes trim for drywall and tile surfaces.

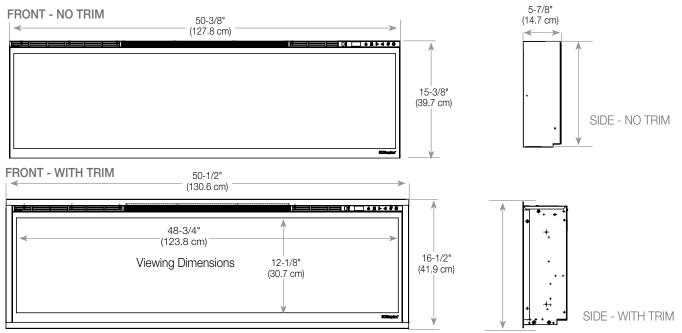

Framing Dimensions:

NOTE: The bottom sill needs to be a minimum of 3-1/2" (8.9 cm) deep. The sill can be constructed to support the front of the unit to allow the power supply wires to easily be run behind or flush with the back of the unit and a pass through hole drilled for electrical wire routing.

It is recommended that the bottom of the unit be mounted between 30" (76.2 cm) and 40" (102 cm) from the ground to maintain an optimized viewing angle of the flame.

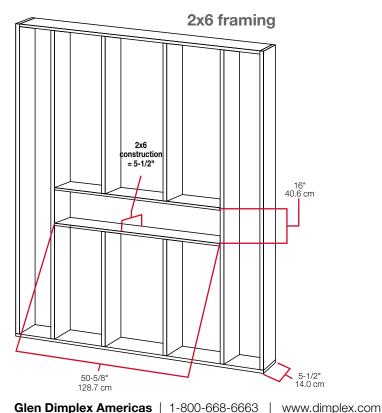

©2023 Glen Dimplex Americas | 3P-004-R00 -052523

2x4 construction = 3-1/2" 40.6 cm 40.6 cm 40.6 cm 40.6 cm 50-5/8" 128.7 cm

(3) A BRAND OF GLEN DIMPLEX AMERICAS

2x4 framing